

WIRING ACCESSORIES

WATERPROOF IP68

CE cULus ROHS TÜV ISO9001



PG/M . . . Plastic Block Packs



Material : Nylon Plastic PA


Protection Degree : IP68

Ambient Temperature : -40°C To 100°C

Supply Color : Grey ● RAL7035

Black ● RAL9005

Other Color, Please Inquiry

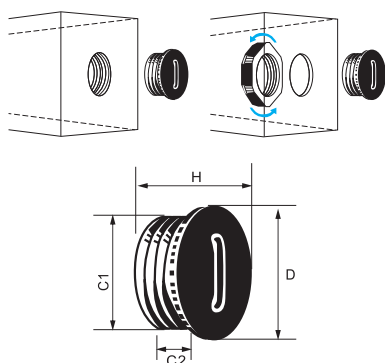

Thread	C1 mm	C2 mm	H mm	D mm	Number	
					GRAY RAL7035	BLACK RAL9005
PG7	12.5	8.5	12	15	P0710PA	P0711PA
PG9	15.2	8.5	12	19	P0910PA	P0911PA
PG11	18.6	9	13	22	P1110PA	P1111PA
PG13.5	20.4	9	13	25	P1310PA	P1311PA
PG16	22.5	10.5	15	27	P1610PA	P1611PA
PG21	28.3	8.5	15	33	P2110PA	P2111PA
PG29	36.5	11.5	17	44	P2910PA	P2911PA
PG36	47.3	13.5	18	55	P3610PA	P3611PA
PG42	54	13.5	20	62	P4210PA	P4211PA
PG48	59.3	14.5	20	68	P4810PA	P4811PA

M12×1.5	12	8.5	12	15	M1210PA	M1211PA
M16×1.5	16	8.5	12	19	M1610PA	M1611PA
M18×1.5	18	9	13	22	M1810PA	M1811PA
M20×1.5	20	9	13	25	M2010PA	M2011PA
M22×1.5	22	10.5	15	27	M2210PA	M2211PA
M25×1.5	25	10.5	15.5	30	M2510PA	M2511PA
M28×1.5	28	10.5	15	33	M2810PA	M2811PA
M32×1.5	32	10.5	15	38	M3210PA	M3211PA
M40×1.5	40	11.5	18	46	M4010PA	M4011PA
M50×1.5	50	13.5	18	56	M5010PA	M5011PA
M63×1.5	63	14	19	60	M6310PA	M6311PA



PG/M . . . Metal Block Packs


CE cULus RoHS TÜV ISO9001

Material: Nickle-plated Brass

Protection Degree: IP68

O-seal Circle: NBR

Ambient Temperature: -40°C To 100°C

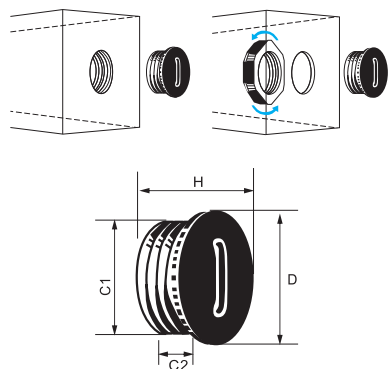

Thread	C1 mm	C2 mm	H mm	D mm	Number
PG7	12.5	5	8	14	T • P071
PG9	15.2	6	9	18	T • P091
PG11	18.6	6	9	20	T • P111
PG13.5	20.4	6.5	9.5	22	T • P131
PG16	22.5	6.5	9.5	24	T • P161
PG21	28.3	7	11	30	T • P211
PG29	36.5	8	12	39	T • P291
PG36	47.3	9	15	50	T • P361
PG42	54	10	16	57	T • P421
PG48	59.3	10	16	64	T • P481

M12×1.5	12	5	8	14	T • M121
M16×1.5	16	6	9	18	T • M161
M18×1.5	18	6	9	20	T • M181
M20×1.5	20	6.5	9.5	22	T • M201
M22×1.5	22	6.5	9.5	24	T • M221
M25×1.5	25	7	11	28	T • M251
M32×1.5	32	8	12	35	T • M321
M40×1.5	40	9	15	44	T • M401
M50×1.5	50	10	16	54	T • M501
M63×1.5	63	10	16	70	T • M631