

WIRING ACCESSORIES

WATERPROOF IP68

CE cULUS ROHS TÜV ISO9001





PG/PG-length • • • Plastic cable Glands

CE cRUUS RoHS TÜV ISO9001

Material: Nylon Plastic PA

Hermetic Seal: NBR

Protection Degree: IP68 (Rotate Position, With O-seal)

Ambient Temperature:


Quiescent State - 40°C To 100°C, Short Time To 120°C

Dynamic -20°C To 80°C, Short Time To 100°C.

Supply Color: Grey ● RAL7035

Black ● RAL9005

Other Color, Please Inquiry

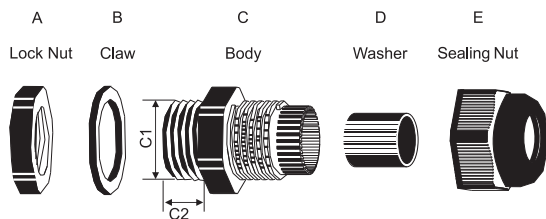


Thread	Øk mm	C1 mm	C2 mm	H mm	φ mm	Number	
						GRAY RAL7035	BLACK RAL9005
PG7	3-6.5	12.5	8	22	16	P0708060	P0708061
PG9	4-8	15.2	8	26	19	P0908080	P0908081
PG11	5-10	18.6	8	27	22	P1108100	P1108101
PG13.5	6-12	20.4	9	28	24	P1309120	P1309121
PG16	8-14	22.5	10	30	27	P1610140	P1610141
PG19	12-15	24	10	30	33	P1910150	P1910151
PG19	13-18	24	10	35	33	P1910152	P1910153
PG21	13-18	28.3	10	35	33	P2110180	P2110181
PG25	14-21	30	11	34	36	P2511210	P2511211
PG29	18-25	37	15	40	42	P2912250	P2912251
PG36	22-32	47	18	48	51	P3618320	P3618321
PG42	32-38	54	18	49	60	P4218380	P4218381
PG48	37-44	59.3	18	50	64	P4818440	P4818441
PG63	42-52	70	28	60	75	P6327500	P6327501

PG7L	3-6.5	12.5	15	22	16	P0715060	P0715061
PG9L	4-8	15.2	15	26	19	P0915080	P0915081
PG11L	5-10	18.6	15	27	22	P1115100	P1115101
PG13.5L	6-12	20.4	15	28	24	P1315120	P1315121
PG16L	8-14	22.5	15	30	27	P1615140	P1615141
PG19L	12-15	24	15	30	33	P1915150	P1915151
PG19L	13-18	24	15	35	33	P1915152	P1915153
PG21L	13-18	28.3	15	35	33	P2115180	P2115181
PG25L	14-21	30	15	34	36	P2515210	P2515211
PG29L	18-25	37	18	40	42	P2915250	P2915251

M/M- Length • • • Plastic cable Glands



Material: Nylon Plastic PA
Hermetic Seal: NBR
Protection Degree: IP68 (Rotate Position, With O-seal)
Ambient Temperature:
 Quiescent State-40°C To 100°C, Short Time To 120°C
 Dynamic-20°C To 80°C, Short Time To 100°C.
Supply Color: Grey ● RAL7035
 Black ● RAL9005
 Other Color, Please Inquiry

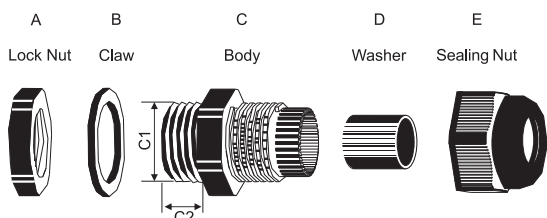

Thread	ϕk mm	C1 mm	C2 mm	H mm	ϕ mm	Number	
						GRAY RAL7035	BLACK RAL9005
M12×1.5	3-6.5	12	8	22	16	M1208060	M1208061
M16×1.5	4-8	16	8	26	19	M1608080	M1608081
M18×1.5	5-10	18	8	27	22	M1808100	M1808101
M20×1.5	6-12	20	9	28	24	M2009120	M2009121
M22×1.5	10-14	22	10	30	27	M2210140	M2210141
M25×1.5	12-15	25	10	30	33	M2510150	M2510151
M25×1.5	13-18	25	10	35	33	M2510152	M2510153
M28×1.5	13-18	28	10	35	33	M2810180	M2810181
M32×1.5	14-21	32	11	34	36	M3211210	M3211211
M36×1.5	18-25	36	15	40	41	M3612250	M3612251
M40×1.5	22-32	40	18	48	51	M4018320	M4018321
M50×1.5	32-38	50	18	49	60	M5018380	M5018381
M63×1.5	37-44	63	18	50	67	M6318440	M6318441

M12×1.5L	3-6.5	12	15	22	16	M1215060	M1215061
M16×1.5L	4-8	16	15	26	19	M1615080	M1615081
M16×1.5L	4-8	16	20	26	19	M1620080	M1620081
M18×1.5L	5-10	18	15	27	22	M1815100	M1815101
M20×1.5L	6-12	20	15	28	24	M2015120	M2015121
M22×1.5L	10-14	22	15	30	27	M2215140	M2215141
M25×1.5L	12-15	25	15	30	33	M2515150	M2515151
M25×1.5L	13-18	25	15	35	33	M2515152	M2515153
M28×1.5L	13-18	28	15	35	33	M2815180	M2815181
M32×1.5L	14-21	32	15	34	36	M3215210	M3215211
M36×1.5L	18-25	36	18	40	41	M3615250	M3615251



BSP/BSP-Length . . . Plastic Cable Glands

CE cRUUS RoHS TÜV ISO9001

Material: Nylon Plastic PA

Hermetic Seal: NBR

Protection Degree: IP68 (Rotate Position, With O-seal)

Ambient Temperature:


Quiescent State -40°C To 100°C, Short Time To 120°C

Dynamic -20°C To 80°C, Short Time To 100°C.

Supply Color: Grey ● RAL7035

Black ● RAL9005

Other Color, Please Inquiry

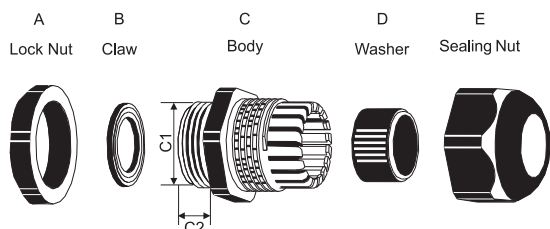


Thread	Øk mm	C1 mm	C2 mm	H mm	φ mm	Number	
						GRAY RAL7035	BLACK RAL9005
BSP 1/4	3-6.5	13	8	22	16	B1408060	B1408061
BSP 3/8	5-10	16.5	9	26	22	B3809080	B3809081
BSP 1/2	6-12	20.9	9	30	24	B1209120	B1209121
BSP 3/4	13-18	26.4	11	37	33	B3411180	B3411181
BSP 1	18-25	33	12	40	42	B1012250	B1012251
BSP 1 1/4	25-32	41.9	15	40	52	B1515250	B1515251
BSP 1 1/2	32-38	47.5	15	48	60	B1315320	B1315321
BSP 2	37-44	59.6	15	50	68	B2015440	B2015441
BSP 1/4L	3-6.5	13	15	22	16	B1415060	B1415061
BSP 3/8L	5-10	16.5	15	26	22	B3815080	B3815081
BSP 1/2L	6-12	20.9	15	30	24	B1215120	B1215121
BSP 3/4L	13-18	26.4	15	37	33	B3415180	B3415181
BSP 1L	18-25	33	15	40	42	B1015250	B1015251
BSP 1 1/4L	25-32	41.9	18	40	52	B1518250	B1518251
BSP 1 1/2L	32-38	47.5	18	48	60	B1318320	B1318321
BSP 2L	37-44	59.6	18	50	68	B2018440	B2018441

MG . . . Plastic Cable Glands



Material: Nylon Plastic PA
Hermetic Seal: NBR
Protection Degree: IP68 (Rotate Position, With O-seal)
Ambient Temperature:
 Quiescent State -40°C To 100°C, Short Time To 120°C
 Dynamic -20°C To 80°C, Short Time To 100°C.
Supply Color: Grey ● RAL7035
 Black ● RAL9005
 Other Color, Please Inquiry

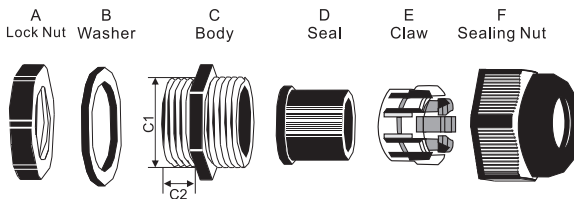


Thread	Øk mm	C1 mm	C2 mm	φ mm	Number	
					GRAY RAL7035	BLACK RAL9005
MG12	4.5-8	12	9	17/19	MG12080	MG12081
MG12	3-5.3	12	9	17/19	MG12050	MG12051
MG16	6-10	16	15	22	MG16100	MG16101
MG16	4-7	16	15	22	MG16070	MG16071
MG20	9-14	20	15	26/27	MG20140	MG20141
MG20	6-11	20	15	26/27	MG20110	MG20111
MG25	13-18	25	15	32/33	MG25180	MG25181
MG25	10-16	25	15	32/33	MG25160	MG25161
MG32	18-25	32	15	41	MG32250	MG32251
MG32	15-22	32	15	41	MG32220	MG32221
MG40	24-30	40	20	50	MG40300	MG40301
MG40	20-25	40	20	50	MG40250	MG40251
MG50	30-40	50	23	60/62	MG50400	MG50401
MG50	26-32	50	23	60/62	MG50320	MG50321
MG63	40-50	63	24	73/75	MG63500	MG63501
MG63	38-46	63	24	73/75	MG63460	MG63461



PG/M . . . Bend-proof Cable Glands

CE cRUUS RoHS TÜV ISO9001

Material: Nylon Plastic PA
Hermetic Seal: NBR
Protection Degree: IP68 (Rotate Position, With O-seal)
Ambient Temperature:
 Quiescent State -40°C To 100°C, Short Time To 120°C
 Dynamic -20°C To 80°C, Short Time To 100°C.
Supply Color: Grey ● RAL7035
 Black ● RAL9005
 Other Color, Please Inquiry

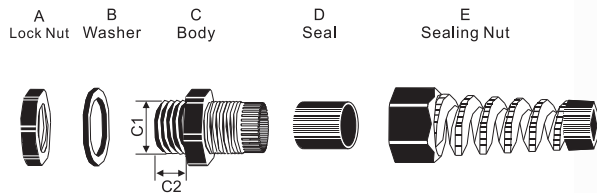

Thread	Øk mm	C1 mm	C2 mm	H mm	φ mm	Number	
						GRAY RAL7035	BLACK RAL9005
PG7	3-6.5	12.5	8	65	16	P0708060F	P0708061F
PG9	4-8	15.2	8	70	19	P0908080F	P0908081F
PG11	5-10	18.6	8	78	22	P1108100F	P1108101F
PG13.5	6-12	20.4	9	90	24	P1309120F	P1309121F
PG16	8-14	22.5	10	100	27	P1610140F	P1610141F
PG21	13-18	28.3	10	112	33	P2110180F	P2110181F
M12×1.5	3-6.5	12	8	65	16	M1208060F	M1208061F
M16×1.5	4-8	16	8	70	19	M1608080F	M1608081F
M18×1.5	5-10	18	8	78	22	M1808100F	M1808101F
M20×1.5	6-12	20	9	90	24	M2009120F	M2009121F
M22×1.5	10-14	22	10	100	27	M2210140F	M2210141F
M25×1.5	13-18	25	10	112	33	M2510180F	M2510181F
M28×1.5	13-18	28	10	112	33	M2810180F	M2810181F